



BESTSELLER

AUTUMN 2025

PERFECT LIGHTING FOR YOUR PROJECT

Through our meticulously curated portfolio, we provide lighting solutions that excel not only in functionality but also in aesthetic appeal. Whether for modest or extensive projects, we offer the ideal lighting to showcase both interior and exterior spaces to their fullest advantage. Firalux stands for quality, innovation and durability—precisely what your clientele expect.

With three decades of specialist expertise and serving in excess of 1,800 satisfied clients annually.

**We are pleased to offer
advisory services.**
+41 61 485 13 13



High Stock Availability

Over 1,000 items available directly from our own warehouse



Available Around the Clock

Order 24/7 via our webshop



Fast and Efficient

Order today – delivered tomorrow



5-Year Warranty

Because longevity is our promise



Personal and Individual Support

You will have your own dedicated contact



Lighting Design Consultancy

Expert advice and full support

OUR WEBSHOP

Everything for your project – swift and straightforward.



shop.firalux.ch



Interior lights



Exterior lights



Lamps & Light Sources

A TRADITION OF CRAFTSMANSHIP

Since 1996, we have established ourselves as a reliable partner within the Swiss market for lighting solutions of all kinds and across all sectors. We provide consultancy to lighting planners, lighting designers, electrical planners, and architects for both interior and exterior lighting applications. Our efficient team is dedicated daily to your needs and concerns—whether at our headquarters in Böckten BL or through our regional sales managers located throughout Switzerland.

Quality, longevity, and product safety are our commitment.



PASCAL HEIZ

+41 79 543 53 66
pascal.heiz@firalux.ch
CEO



DAVID SUTTER

+41 61 485 13 13
david.sutter@firalux.ch
Owner








EVERYTHING AT A GLANCE










Contacts 6

Interior lights 8





Recessed Spotlights 10






Individual lights 20



Renovation 28



Accessories 32

	Mounting Boxes		FiraDim®		Dingz
	33		34		35

Exterior lights 36

Exterior lights. 38

	Out Box W up-down LED		Velaris		Saturn Round / Saturn Square
	39		39		40
	Charisma 2		Mini Cyclops® 35 / 70		Nova
	41		42		43



YOUR PERSONAL CONTACT

We are pleased to provide on-site consultation. Please contact one of our regional sales managers in your canton.



NIKOLA ARSIC

+41 79 503 61 39
nikola.arsic@firalux.ch
Zürich



NICOLA ROSAMILIA

+41 79 314 37 87
nicola.rosamilia@firalux.ch
North-western Switzerland



LUCA HAENNI

+41 79 873 96 36
luca.haenni@firalux.ch
Bern region



DANIEL STÄGER

+41 79 207 09 20
daniel.staeger@firalux.ch
North-eastern Switzerland

We are pleased to advise you
Customer Service Centre
+41 61 485 13 13

WhatsApp Number
+41 79 244 66 75



TONI ZELIC

+41 79 277 18 15
toni.zelic@firalux.ch
Central Switzerland



GERRY KAISER

+41 79 540 52 50
gerry.kaiser@firalux.ch
Eastern Switzerland



MIRKO STOMEIO

+41 79 873 96 35
mirko.stomeo@firalux.ch
KAM



STÉPHANE MONHART

+41 79 202 45 01
stephane.monhart@firalux.ch
Western Switzerland

INTERIOR LIGHTS

Our range of interior lights provides everything required for high-quality lighting solutions. This offering is complemented by suitable accessories and a selection of stylish individual lights.



SPOTS AT A GLANCE

THE AFFORDABLE BASICS



DOB CCT

11



SET *FiraClick*
Firaled® **GU10**

12



DOB Slim

13

THE VERSATILE PERFORMERS



AIO R7

14



AIO R10

15



AIO R10 BIG

16



RO-LED-HO
Flat

16

THE EXCLUSIVE ICONS



AIO Deep

17



SET *FiraClick*
Firaled® **BASIC**

18



SET *FiraClick*
Firaled® **DALI**

19

SPOTLIGHTS


Our spotlights combine flexibility, elegance, and maximum efficiency. They provide precise, targeted illumination and integrate seamlessly into any environment. Thanks to simple installation and outstanding light quality, they are the first choice for any project.

CONFIGURE INDIVIDUALLY

Compile your personal set using our configurator and order it simply and conveniently via the web-shop.



DOB CCT

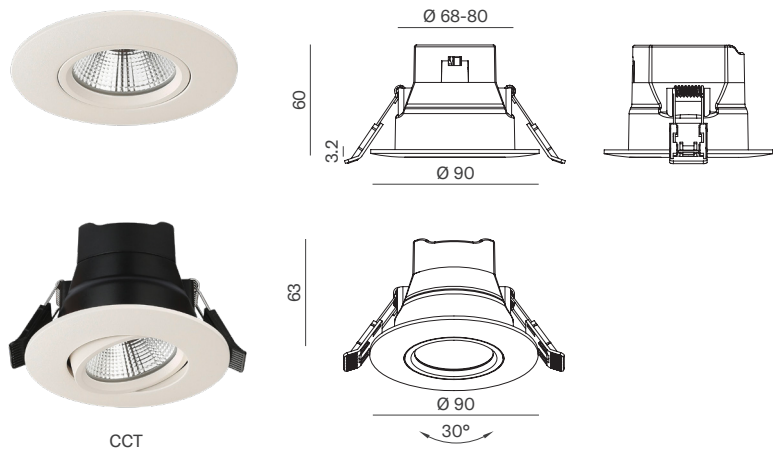

Ceiling light, Orientable 30°

Aluminium die-cast housing, leading-edge dimmable, integrated 300mA driver, includes 3-pole WAGO terminal block, beam angle 36°, IP65, lifetime: 50,000 hrs / L80, cut-out: 68-80 mm.



Product	Housing Colour	Luminous Flux	Kelvin	Angle	Item No.	CHF
DOB CCT	matt white	553 lm, 600 lm, 584 lm	2700 K, 3000 K, 4000 K	36°	FB-DOBV2-WM-90-CCT	60.00
DOB CCT	black	553 lm, 600 lm, 584 lm	2700 K, 3000 K, 4000 K	36°	FB-DOBV2-SZ-90-CCT	60.00
DOB CCT	brushed aluminium	553 lm, 600 lm, 584 lm	2700 K, 3000 K, 4000 K	36°	FB-DOBV2-AS-90-CCT	65.00

- ✦ Direct 230V
- ✦ Requires no transformer tunnel
- ✦ Adjustable light colour



Housing Colour: matt white

✦ Easy lamp replacement



Housing colour: matt white

SET *FiraClick / FiraClick Mini* **GU10**



FiraClick Spot
FB-75/90
(Cut-out 75-80mm)

+



GU10 5.5 W

Or



GU10 8 W

Ceiling light, orientable

Comprising the FiraClick Spot FB-75/90 (cut-out 75-80 mm) and a GU10 LED lamp (5.5 W / 8 W), including a strain relief and a connection box for simplified installation in the following variants:

Housing colours: WM = matt white | BM = matt black


AS = brushed aluminium | CM = matt chrome | CB = chrome black

Mounting ring	Housing colour	Power	Colour rendering	Luminous flux	Kelvin	Beam angle	Item No.	CHF
FB-75/90	WM	LM 5.5 W	CRI 90	345 lm	3000 K	36°	SET-RETRO-00219-A	30.00
FB-75/90	WM	LM 8 W	CRI 90	600 lm	3000 K	36°	SET-RETRO-00420-A	39.00
FB-75/90	WM	LM 8 W	CRI 90	600 lm	3000 K	60°	SET-RETRO-00520-A	39.00

Surcharge for metallic housing colours AS | CM | CB

5.00

The FB-68/80 mounting ring can be selected as an alternative to the FB-75/90 mounting ring.




Order also:

FiraClick Mini Spot FB-68/80
(Cut-out 68 mm)

DOB Slim



Slim

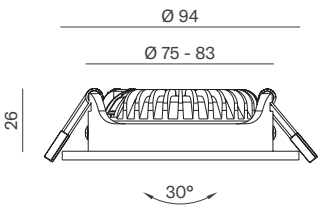

Ceiling light, orientable 30°

Aluminium die-cast housing, leading-edge dimmable, including driver, beam angle 38°, IP20, lifetime: 25,000 hrs / L80, Cut-out: 75-83 mm




Product	Housing colour	Power	Luminous flux	Kelvin	Beam angle	Item No.	CHF
DOB Slim	matt black	5W	450 lm	3000 K	30°	FB-DOB-SLIM-30-SZ	39.00
DOB Slim	matt white	5W	450 lm	3000 K	30°	FB-DOB-SLIM-30-WM	39.00
DOB Slim	red bronze	5W	450 lm	3000 K	30°	FB-DOB-SLIM-30-RB	53.00

- ✦ Direct 230V
- ✦ Very low installation depth



Housing colour: matt black and matt white

AIO R7

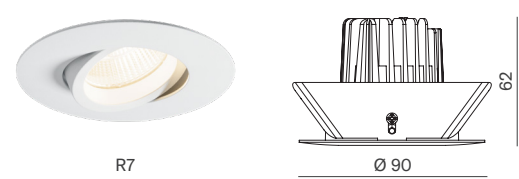

✦ **Wide rim for
various drill holes**

Ceiling light, orientable

Aluminium die-cast housing with trapezoidal spring clips, clear front glass, orientable 25°,
including dimmable leading-edge converter


R7: Cut-out diameter: Ø 68-80 mm

Housing colours: WM = matt white | BM = matt black
AS = brushed aluminium | CM = matt chrome



Product	Housing colour	Power	Colour rendering	Luminous flux	Kelvin	Beam angle	Item No.	CHF
AIO R7	WM	7 W	CRI 92	700 lm	3000 K	36°	AIO-WM-92-0730.2-A	67.00
AIO R7	BM	7 W	CRI 92	700 lm	3000 K	36°	AIO-BM-92-0730.2-A	67.00
AIO R7	AS	7 W	CRI 92	700 lm	3000 K	36°	AIO-AS-92-0730.2-A	71.00
AIO R7	CM	7 W	CRI 92	700 lm	3000 K	36°	AIO-CM-92-0730.2-A	71.00
Surcharge for DALI								46.00

AIO R10

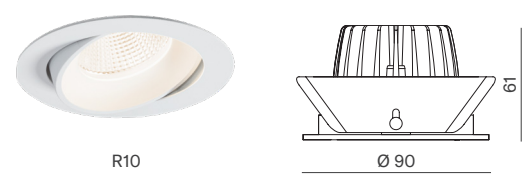

Ceiling light, orientable
 Aluminium die-cast housing with trapezoidal spring clips, clear front glass, orientable 25°,
including dimmable leading-edge converter
 R10: Cut-out diameter: Ø 80 mm

Housing colours: WM = matt white | BM = matt black
 AS = brushed aluminium | CM = matt chrome



Product	Housing colour	Power	Colour rendering	Luminous flux	Kelvin	Beam angle	Item No.	CHF
AIO R10	WM	10 W	CRI 92	870 lm	3000 K	36°	AIO-WM-92-1030.2-A	68.00
AIO R10	BM	10 W	CRI 92	870 lm	3000 K	36°	AIO-BM-92-1030.2-A	68.00
AIO R10	AS	10 W	CRI 92	870 lm	3000 K	36°	AIO-AS-92-1030.2-A	72.00
AIO R10	CM	10 W	CRI 92	870 lm	3000 K	36°	AIO-CM-92-1030.2-A	72.00
Surcharge for DALI								46.00

- ✦ Our bestseller
- ✦ Compact and high-performance




Housing colour: matt white

AIO R10 BIG



BIG

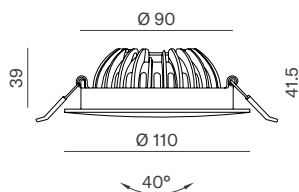

✦ Replacement for PL-lights

LED spotlight

Aluminium die-cast housing with electronic control gear, leading-edge dimmable, orientable 40°

R10: Cut-out diameter: Ø 90 mm

Housing colours: WM = matt white | BM = matt black



Product	Housing colour	Power	Colour rendering	Luminous flux	Kelvin	Beam angle	Item No.	CHF
AIO R10 BIG	WM	10,5 W	CRI >90	1113 lm	3000 K	40°	AIO-WM-90-1030B.2A	69.00
AIO R10 BIG	BM	10,5 W	CRI >90	1113 lm	3000 K	40°	AIO-BM-90-1030B.2A	69.00


Surcharge for DALI

46.00

RO-LED-HO Flat



RO-LED-HO Flat

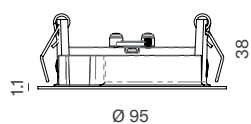

✦ Low installation depth

Ceiling light, orientable

Recessed ceiling luminaire made of aluminium die-cast with clamp springs, integrated LED module, orientable 30°, cut-out diameter: Ø 80 mm, cover: 1.1 mm, including various converters, installation depth: 38 mm


Housing colours: WM = matt white | AS = brushed aluminium | CM = matt chrome



Product	Housing colour	Power	Colour rendering	Luminous flux	Kelvin	Beam angle	Dimming Method	Item No.	CHF
RO-LED-HO	WM	6.2 W	CRI 90	657 lm	3000 K	30°	leading-edge	B-HOWM-90-630.2F	139.00
RO-LED-HO	WM	6.2 W	CRI 90	657 lm	3000 K	30°	leading-edge	P-HOWM-90-630.2	152.00
RO-LED-HO	WM	6.2 W	CRI 90	657 lm	3000 K	30°	DALI	P-HOWM-90-630.3	168.00
RO-LED-HO	WM	9.1 W	CRI 90	1133 lm	3000 K	30°	leading-edge	B-HOWM-90-930.2F	147.00
RO-LED-HO	WM	9.1 W	CRI 90	1133 lm	3000 K	30°	leading-edge	P-HOWM-90-930.2	160.00
RO-LED-HO	WM	9.1 W	CRI 90	1133 lm	3000 K	30°	DALI	P-HOWM-90-930.3	175.00

Surcharge for metallic housing colours AS | CM

15.00

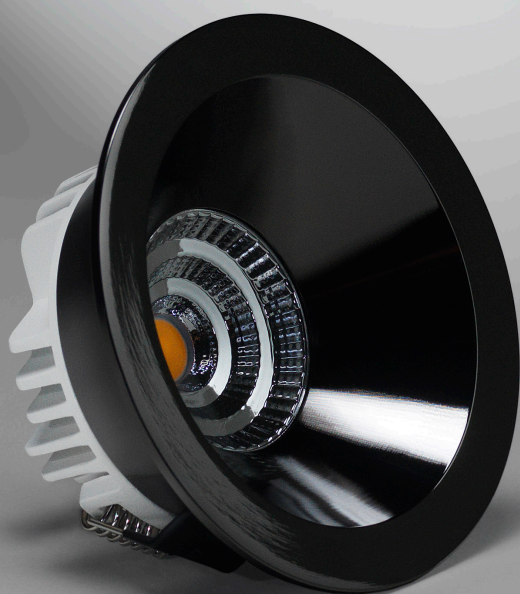


- ✦ High-quality design
- ✦ Excellent glare control

Housing colour: chrome black

AIO DEEP



AIO DEEP



Ceiling light

Aluminium die-cast housing with clamp springs, clear front glass, fixed, including dimmable leading-edge converter, cut-out diameter: Ø 80 mm

Housing colours: WM = matt white | BM = matt black | CB = chrome black




Product	Housing colour	Power	Colour rendering	Luminous flux	Kelvin	Beam angle	Item No.	CHF
AIO DEEP	WM	7 W	CRI 90	700 lm	3000 K	38°	AIO-WM-90-0730D.2A	65.00
AIO DEEP	BM	7 W	CRI 90	700 lm	3000 K	38°	AIO-BM-90-0730D.2A	65.00
AIO DEEP	CB	7 W	CRI 90	700 lm	3000 K	38°	AIO-CB-90-0730D.2A	68.00
AIO DEEP	WM	7 W	CRI 90	700 lm	2700 K	38°	AIO-WM-90-0727D.2A	65.00
AIO DEEP	BM	7 W	CRI 90	700 lm	2700 K	38°	AIO-BM-90-0727D.2A	65.00
AIO DEEP	CB	7 W	CRI 90	700 lm	2700 K	38°	AIO-CB-90-0727D.2A	68.00

Surcharge for DALI

41.00

✦ Lamps and converters
replaceable at
any time

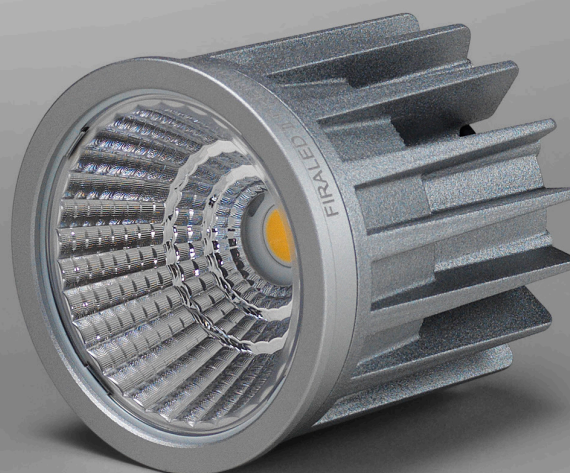

SET *FiraClick Firaled*® **Basic**



FiraClick Spot
FB-75/90
(Cut-out 75-80mm)



LED-Module 9.1 W



LED-Converter 350 mA

Ceiling light, orientable

Comprising the *FiraClick* Spot FB-75/90 (cut-out 75-80 mm), the *Firaled*® LED Module (9.1 W) and the **Basic** LED Converter 91135 (leading-edge dimmable) in the following variants:

Housing colours: WM = matt white | BM = matt black

AS = brushed aluminium | CM = matt chrome | CB = chrome black



Mounting ring	Housing colour	Power	Colour rendering	Luminous flux	Kelvin	Beam angle	Item No.	CHF
FB-75/90	WM	LM 9.1 W	CRI 90	936 lm	2700 K	36°	F-BFCWM-90-927.2	90.00
FB-75/90	WM	LM 9.1 W	CRI 90	953 lm	3000 K	36°	F-BFCWM-90-930.2	90.00

Surcharge for metallic housing colours AS | CM | CB

6.00

The FB-68/80 mounting ring may be selected as an alternative to the FB-75/90 mounting ring.



Order also:

FiraClick Mini Spot FB-68/80
(Cut-out 68 mm)

SET **FiraClick Firaled®** **DALI**



FiraClick Spot
FB-75/90
(Cut-out 75-80mm)



LED-Module 9.1 W / DW



DALI converter Firaled®
dimmable

✦ **Highest standard
thanks to DALI**

Ceiling light, orientable

Comprising the *FiraClick* Spot FB-75/90 (cut-out 75-80 mm), the Firaled® LED module (9.1 W) and the **DALI** LED Converter SP-92035-A in the following variants:


Housing colours: WM = matt white | BM = matt black
AS = brushed aluminium | CM = matt chrome | CB = chrome black



Mounting ring	Housing colour	Power	Colour rendering	Luminous flux	Kelvin	Beam angle	Item No.	CHF
FB-75/90	WM	LM 9.1 W	CRI 97	807 lm	2700 K	36°	F-PFCWM-97-927.3	134.00
FB-75/90	WM	LM 9.1 W	CRI 97	918 lm	3000 K	36°	F-PFCWM-97-930.3	134.00

Surcharge for metallic housing colours AS | CM | CB **6.00**

The FB-68/80 mounting ring may be selected as an alternative to the FB-75/90 mounting ring.

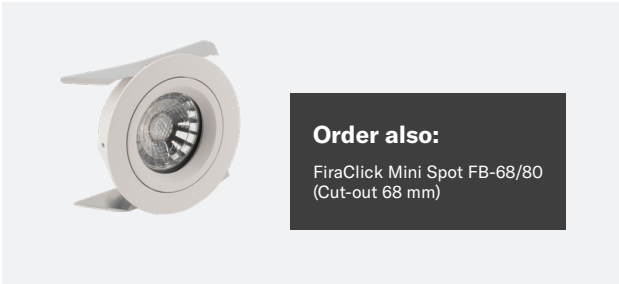

INDIVIDUAL LIGHTS

Firalux individual lights are more than mere light sources – they create accents and a distinctive atmosphere. Whether functional or decorative, our solutions impress with timeless design and durable quality that will delight your clients.

Easyled CCT MW



Easyled CCT MW




Easyled PIR-Sensor



Remote control

✦ Easy installation

✦ Attractive price

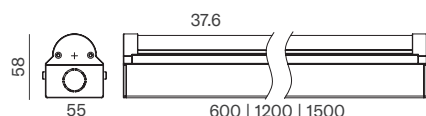

Wall/ceiling light

Aluminium housing, opal polycarbonate diffuser, rear or side connection options, switchable light colour, switchable power output, lifetime: 50,000 hrs / L80

CCT = Switchable between 3000 K / 4000 K / 5000 K



Product	Power	Kelvin	Colour	Item No.	CHF
Easyled 600 mm	10 W, 15 W, 20 W	3000 K, 4000 K, 5000 K	matt white	TO-0600-CCT-MW	55.00
Easyled 1200 mm	20 W, 30 W, 40 W	3000 K, 4000 K, 5000 K	matt white	TO-1200-CCT-MW	72.00
Easyled 1500 mm	30 W, 40 W, 50 W, 60 W	3000 K, 4000 K, 5000 K	matt white	TO-1500-CCT-MW	86.00

Surcharge for NOT **242.00**

Easyled PIR sensor **53.00**

Remote control **12.00**



NEW

Also available
in black




Product	Power	Kelvin	Colour	Item No.	CHF
Easyled 1200 mm	20 W, 30 W, 40 W	3000 K, 4000 K, 5000 K	black	TO-1200-CCT-BM	77.00
Easyled 1500 mm	30 W, 40 W, 50 W, 60 W	3000 K, 4000 K, 5000 K	black	TO-1500-CCT-BM	91.00

Surcharge for NOT **242.00**

Easyled PIR sensor **53.00**

Remote control **12.00**

Spectrum 3



Spectrum 3

Ceiling light

Aluminium die-cast housing, light output angle 50°, IP54, dimmable with leading-/trailing-edge dimmer, lifetime: 50,000 hrs / L80

Housing colours: WM = matt white | BM = matt black



Product	Housing colour	Power	Luminous flux	Kelvin	Diameter	Item No.	CHF
Spectrum 3	WM	13 W	1100 lm	3000 K	Ø 90 mm	FB-WM-80-1330	86.00
Spectrum 3	BM	13 W	1100 lm	3000 K	Ø 90 mm	FB-BM-80-1330	86.00

- ✦ High IP rating
- ✦ Easy installation




Housing colour: matt black

Fortis



Fortis

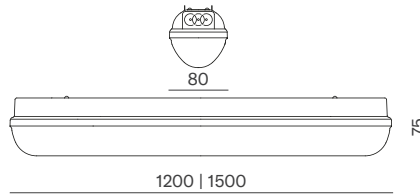

- ✦ Incl. 5x2.5mm² through-wiring
- ✦ IP65
- ✦ Attractive price

Wall/ceiling light

Injection-moulded polycarbonate housing grey, impact-resistant prismatic cover, stainless-steel safety locks, stainless-steel mounting bracket, 230 V connection, through-wiring 5x2.5mm², IP65, RA > 80, IK08, protection class I, operating temperature -20 °C to +40 °C, non-dimmable/DALI, dimensions (L×W×H): 1200/1500 × 80 × 75 mm, Lifetime: 50,000 hours / L80/B10


IP
65

Product	Power	Luminous flux	Kelvin	Angle	Item No.	CHF
Fortis 1200 mm	20-40 W	2700-5400 lm	3000 K, 4000 K, 5000 K	120°	TO-TR500-1200-CCT	96.00
Fortis 1500 mm	30-60 W	4050-8100 lm	3000 K, 4000 K, 5000 K	120°	TO-TR500-1500-CCT	110.00
Surcharge for DALI						30.00
Surcharge for NOT						242.00

Smooth



Smooth



24

- ✦ Indirect light switchable on/off
- ✦ Switchable light colour
- ✦ Attractive price

Surface-mounted light, fixed

Smooth surface-mounted light, LED 20 W, 2700 K/3000 K/4000 K, 120°, 100 lm/W, RA > 80, PF > 0.9, including converter (Triac dimmable), flicker-free, plastic housing, colour white, satin diffuser (homogeneous illumination), IP20, dim. Ø = 293/397 × 24 mm, light output switchable via toggle switch: either direct light or combination of direct and indirect light, lifetime: 50,000 hours. Ceiling canopy for indirect ceiling illumination (with gap to ceiling) not included – available separately.


IP
20

Product	Power	Diameter	Luminous flux	Angle	Kelvin	Item No.	CHF
Smooth	20 W	293 mm	2100 lm	120°	2700 K, 3000 K, 4000 K	HM-S293M-20W-CCT	86.00
Smooth	30 W	397 mm	3150 lm	120°	2700 K, 3000 K, 4000 K	HM-S397M-30W-CCT	140.00

Further accessories

Product	Item No.	CHF
Small ceiling canopy	HM-S293M-DB	8.00
Large ceiling canopy	HM-S397M-DB	10.00

PUR CCT MW (with PIR Sensor)

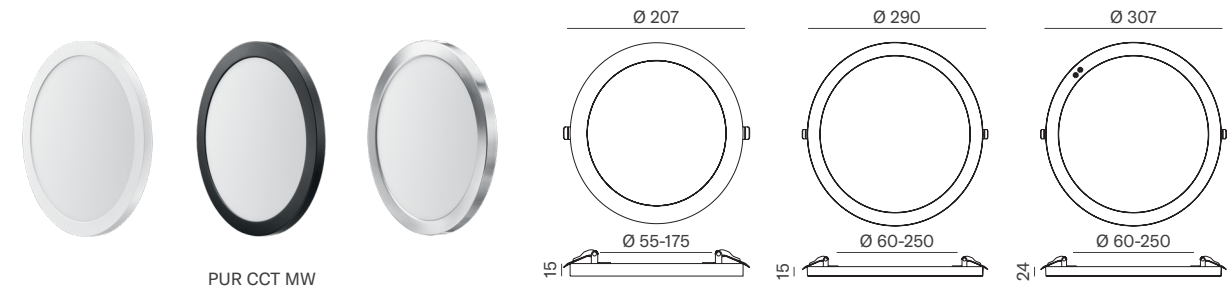

Surface-mounted/recessed light, fixed

Plastic housing, can be mounted as a surface-mounted light or, using the supplied clamp springs, as a recessed luminaire, satin diffuser (homogeneous illumination), front ring white, integrated on/off converter, luminous efficacy 100 lm/W. For lights without PIR: additional magnetic front rings in various colours are available as accessories.

Lifetime: 30,000 hours.

Ceiling cut-out:

Small model: Ø 55-175 mm

Large model: Ø 60-250 mm

✦ **Semi-recessed:**
For covering
existing light cut-
outs




Product	Power	Kelvin	Angle	Item No.	CHF
Pur klein	9 W, 12 W, 18 W	3000 K, 4000 K, 6000 K	120°	HM-1821-CCT-MW	46.00
Pur gross	12 W, 16 W, 24 W	3000 K, 4000 K, 6000 K	120°	HM-2429-CCT-MW	60.00
Pur gross CCT with PIR Sensor	24 W Sensor	3000 K, 4000 K , 6000 K	120°	HM-2430-CCT-PIR	79.00
Surcharge for magnetic front ring* small matt black					10.00
Surcharge for magnetic front ring* large matt black					14.00
Surcharge for magnetic front ring* small brushed nickel					11.00
Surcharge for magnetic front ring* large brushed nickel					15.00

*Front ring cannot be used on lights with PIR sensor.



Paul

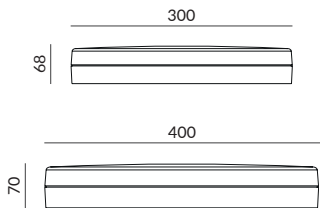

- ✦ **Smart combinable
Emergency/Sensor**
- ✦ **Switchable light
colour**
- ✦ **Long lifetime**


Modular LED universal lights

Paul is the intelligent LED luminaire for demanding applications in commercial spaces, corridors, workshops, and single or multi-family homes. Its modular design makes it particularly easy to retrofit and service – with optional sensor (PIR/microwave) and/or emergency lighting function. The robust IP54 construction ensures safe operation even in harsher environments.

Thanks to switchable colour temperature (3000K/4000K) and a lifetime of up to 100,000 hours (L80B10), Paul is exceptionally versatile, long-lasting and low-maintenance. Retrofittable with emergency and motion sensor functions, as well as swarm functionality.

IP
54

Product	Colour	Diameter	Power	Luminous flux	Item No.	CHF
Paul	white	300 mm	10 W, 12 W, 15 W	1200/1440/1800 lm	ES-CP30-WS	133.00
Paul	black	300 mm	10 W, 12 W, 15 W	1200/1440/1800 lm	ES-CP30-SZ	133.00
Paul	white	400 mm	15 W, 20 W, 25 W	1800/2400/3000 lm	ES-CP40-WS	175.00
Paul	black	400 mm	15 W, 20 W, 25 W	1800/2400/3000 lm	ES-CP40-SZ	175.00
Surcharge for DALI						33.00
Surcharge (with PIR)						26.00
Surcharge (microwave sensor)						36.00
Surcharge for Emergency						100.00

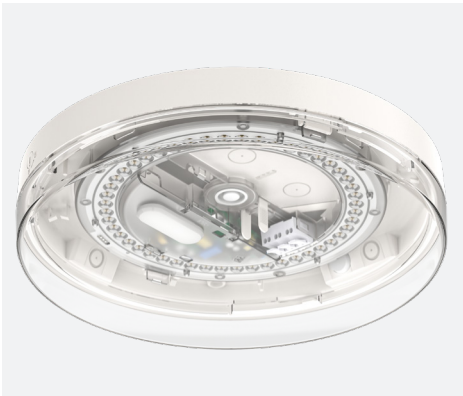



- ✦ Increase sales thanks to better lighting
- ✦ Colour spectrum adjusts automatically
- ✦ Controllable via app



Trinity



Trinity

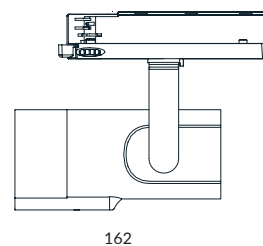

LED track spotlight

Trinity track spotlight, single sensor, AI, LED 20W, 2700K-6500K RGBWW, 1600lm, 80lm/W, CRI>90, black/white, beam angle: 36°/50°, 360° rotatable, 90° tilttable, including converter.


IP
20

Product	Colour	Power	Luminous flux	Item No.	CHF
Trinity	black	20 W	1600 lm	KL-4TR2036RGBWW-SZ	258.00
Trinity	white	20 W	1600 lm	KL-4TR2036RGBWW-WS	258.00

Voltron



Voltron

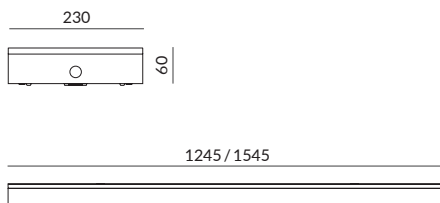

- ✦ **Smart combinable
Emergency/Sensor**
- ✦ **Covers old light
cut-outs**
- ✦ **Light colour/power
switchable**

Ceiling light

White-coated sheet metal, transparent PMMA cover, light output angle 90°, UGR<19, SDCM 3, IP20, IK03, wattage (19 W-32 W) adjustable via DIP switch (2470lm – 4160lm), adjustable light colour (3000 K / 4000 K), lifetime: 100,000 hrs / L80


IP
20

Product	Colour	Length	Power	Luminous flux	Dimming method	Item No.	CHF
Voltron 1200	white	1200 mm	19-32 W	4940 lm	phasenabschn.	ES-SL01-1200-CCT	267.00
Voltron 1200	white	1200 mm	19-32 W	4940 lm	DALI	ES-SL01-1200DA-CCT	360.00
Voltron 1500	white	1500 mm	25-40 W	5200 lm	phasenabschn.	ES-SL01-1500-CCT	324.00
Voltron 1500	white	1500 mm	25-40 W	5200 lm	DALI	ES-SL01-1500DA-CCT	401.00

Stan



Stan

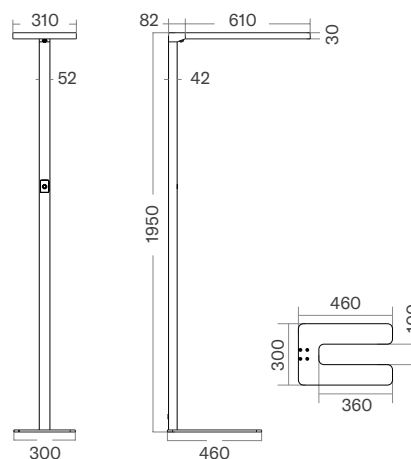

Floor light

Aluminium housing, micro-prismatic polycarbonate diffuser, including motion sensor, including automatic shut-off (after 10 mins dims to 30%, after a further 10 mins switches off), light distribution: 40 W downwards / 40 W upwards, switchable and dimmable via touch panel, daylight sensor, UGR <19, cable length: 2.5 m, lifetime: 50,000 hrs / L80


- ✦ **Easy operation**
- ✦ **Attractive price**

Product	Colour	Power	Kelvin	Item No.	CHF
Stan	sliver	80 W	4000 K	NX-4080S-MD-40	1067.00
Stan	white	80 W	4000 K	NX-4080SW-MD-40	1067.00
Stan	black	80 W	4000 K	NX-4080SZ-MD-40	1067.00

RENOVATION

In renovation projects, every detail counts. Our solutions combine modern technology with simple handling and are specifically designed to efficiently renew existing lighting systems. They enable quick, clean installation without major effort and elevate your spaces to a new level with contemporary light quality.

Remo

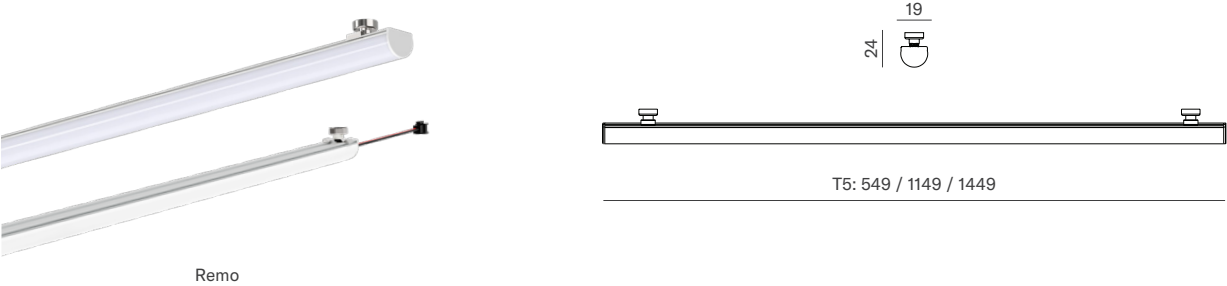

LED replacement lights Remo

LED replacement luminaires, direct LED, On/Off/DALI, 3000K, 4000K, CRI >90, beam angle: 130°, symmetrical light distribution, dimensions (L x W x H): 549mm/1149mm/1449mm x 19mm x 24mm, MacAdam 3, IP20, aluminium profile, PC diffuser, including cable (red/black) with plug/coupling (L: 500mm), including 2x magnets and mounting bracket for fixing onto magnetic surfaces, protection class II, including converter, lifetime: 50,000h (L80), energy efficiency class: D

- ✦ Quick installation
- ✦ Adjustable power
- ✦ High colour rendering


Product	Length	Power	Colour rendering	Luminous flux	Kelvin	Item No.	CHF
Remo	549mm	16-20 W	CRI 90	1751-2185 lm	3000 K	S-UNIL-550-30.1-A	105.00
Remo DALI	549mm	16-20 W	CRI 90	1751-2185 lm	3000 K	S-UNIL-550-30.3-A	178.00
Remo	1149mm	21-39 W	CRI 90	2431-4522 lm	3000 K	S-UNIL-1149-30.1-A	143.00
Remo DALI	1149mm	21-39 W	CRI 90	2431-4522 lm	3000 K	S-UNIL-1149-30.3-A	217.00
Remo	1449mm	40-53 W	CRI 90	4497-5389 lm	3000 K	S-UNIL-1449-30.1-A	160.00
Remo DALI	1449mm	40-53 W	CRI 90	4497-5389 lm	3000 K	S-UNIL-1449-30.3-A	233.00

Also available in 4000K

Fira Line Opal



Opal

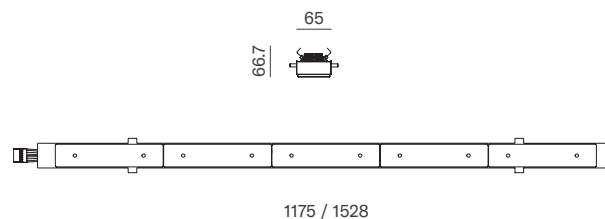

Universal LED linear light retrofit module 3000K/4000K


LED linear luminaire Opal 1175/1528mm, CRI80 3000K/4000K, lm/W=150lm/W, MacAdam: 3, control gear: DALI, energy efficiency class: D, connection selectable between L1, L2 or L3, operating power adjustable from 24W to max. 36W, beam angle 120°, IK02, IP20

- ✦ Quick installation
- ✦ Fits standard tracks


IP
20

Product	Power	Kelvin	Colour	Item No.	CHF
Fira Line Opal / DALI 1175mm	24 - 36 W	3000 K, 4000 K	matt white	F-LINEOP-1175-34.3	254.00
Fira Line Opal / (on/off) 1175mm	21 - 36 W	3000 K, 4000 K	matt white	F-LINEOP-1175-34.1	199.00
Fira Line Opal / DALI 1528mm	18 - 70 W	4000 K	matt white	F-LINEOP-1528-40.3	275.00
Fira Line Opal / (on/off) 1528mm	32 - 60 W	4000 K	matt white	F-LINEOP-1528-40.1	216.00

Fira Line Lens Optics

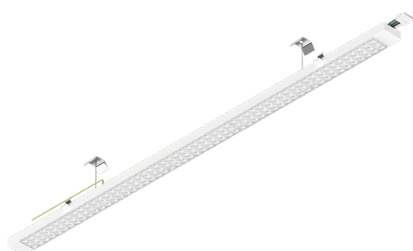

Linsenoptik

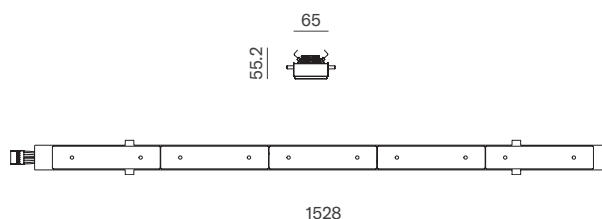

Universal LED linear light retrofit module 4000K


LED linear luminaire Lens 1528mm, CRI80, 4000K, dimensions: 1528/65/55.2mm, lm/W= 160lm/W, MacAdam: 3, control gear: ON/OFF, energy efficiency class: D, connection selectable between L1, L2 or L3, operating power selectable between 60/50/42 or 32W via DIP switch, beam angle 90°, IK02, IP20.

- ✦ Quick installation
- ✦ Fits standard tracks
- ✦ Suitable for heights up to 8m

IP
20

Product	Power	Kelvin	Colour	Item No.	CHF
Fira Line Linse (on/off)	32 - 60 W	4000 K	matt white	F-LINE-1528-40.1	216.00
Fira Line Linse / DALI	18 - 70 W	4000 K	matt white	F-LINE-1528-40.3	275.00

LED Conversion board



LED Retrofit Panel

 **Easy installation**

Conversion board

LED conversion board Ø 190/227/297x23mm with magnetic holders, mounting plate, including integrated, dimmable control gear (Triac dimmable down to max. 20% of full light output), body white RAL9016 and polycarbonate lens, 12/16/24 W, switchable 3000/4000/5000K, 1200 - 2900lm (110lm/W), 120° beam angle, CRI80 SDCM <6, IP20, IK00, protection class I, lifetime: 50,000h L80


IP
20

Product	Diameter	Power	Luminous flux	Colour	Item No.	CHF
LED Retrofit Panel	190mm	12 W	1200 - 1500 lm	white	UE-AL1221012-CCT	43.00
LED Retrofit Panel	227mm	16 W	1500 - 2000 lm	white	UE-AL1221216-CCT	53.00
LED Retrofit Panel	297mm	24 W	2500 - 2900 lm	white	UE-AL1221624-CCT	65.00

ACCESSORIES

The right accessories are crucial for the smooth implementation of your lighting projects. They are perfectly matched to our products and enable straightforward installation.


Mounting Boxes

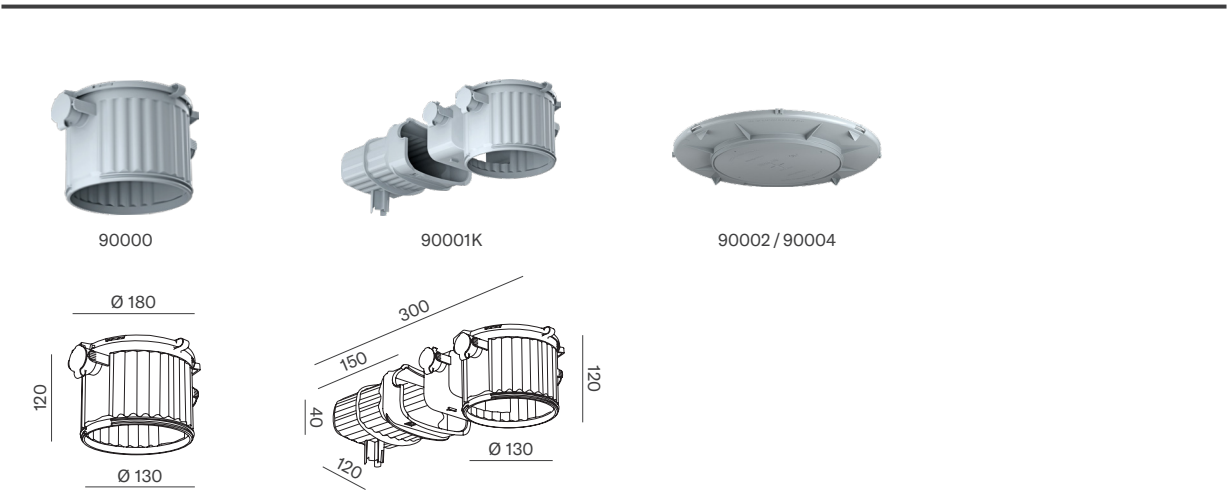

Large-volume concrete housing for HV/LV light
HaloX-O housing for concrete ceilings and walls. The housing and tunnel are made of polyethylene.
Shape-stable up to 100°C and fire-resistant up to 650°C.

Product	Item No.	CHF
HaloX-O / without transformer tunnel	90000	13.00
HaloX-O / with transformer tunnel	90001K	29.00
Front cover / cut-out Ø 68 mm	90002*	8.00
Front cover / cut-out Ø 80 mm	90004*	8.00

*Front covers also available with other diameters.

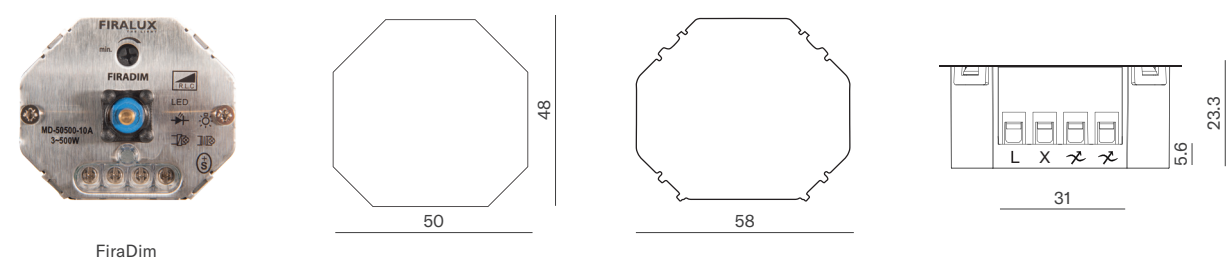

Smart Universal Eco Dimmer

Housing: Front aluminium, body: plastic, integrated two-way switch (Scheme 3), rated voltage 230 V AC, 50 Hz, rated load: 3-450 W, excluding cover plate and mounting frame.

Product	Power	Item No.	CHF
FiraDim® – Universal Dimmer	3-450 W	MD-50500-10A	170.00

Fira

BY FIRALUX DESIGN

New Collection
Available from 2026.

Every light a statement.



Lume



The new standard. Switches. Reimagined.

Everything combined in one switch.

Install as usual. Experience what's possible.
Less effort for you – a WOW for your customers!

Light &
Dimming



Smart
Light



Motion
Sensor



Thermostat



Timer



Weather
Station



Blinds



All OFF




Music


— 2 Front designs, 4 Colours



— 2 Base units



4-Channel Base



dDi Base (for DALI)



Price/performance leader.



High customer satisfaction



Easy installation



Seamless integration



One switch. Full flexibility.



No server. No hub.



Standard wiring.



dingz.ch

EXTERIOR LIGHTS

Our exterior lights are robust, efficient, and stylish. They provide not only security but also accentuate architectural highlights. Thanks to weather-resistant materials and modern technology, they are the ideal choice for long-lasting outdoor lighting.




EXTERIOR LIGHTS

Our exterior lights are versatile lighting solutions that score with well-considered features. They provide targeted illumination for paths, façades, or entrances and are equipped with features such as adjustable light distribution, integrated sensors, or dimmable modules. Thanks to durable materials and innovative technologies, they combine efficiency and functionality – ideal for a wide variety of requirements in outdoor areas.

Out Box W up-down LED



Out Box W



✦ **Light output individually adjustable**

Wall light, one-sided (up or down) | two-sided (up-down)

Aluminium die-cast, polyester powder coating (UV-resistant), including mounting set, glass cover available as an accessory, IK08, lifetime: 60,000 hrs / L90

IP
65

Product	Power	Luminous Flux	Kelvin	Item No.	CHF
Out Box up-down LED	2 x 3.1 W	2 x 351 lm	3000 K	MD-6611-LED-DG	347.00


Further Accessories

Product	Item No.	CHF
Insert Glass-Glasabdeckung	M6611A3-DG	19.00
3M™Scotchlok™314 IDC, blue-white	FB-966430082	4.00

Velaris



Velaris

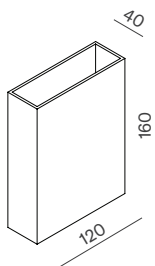

✦ **High-quality design**
✦ **High colour rendering**

Wall light

Whether on façades, entrances, or in corridors: Velaris sets stylish lighting accents – with a 360° up/down light distribution, warm white light (3000K), incl. DALI control gear and an impressive colour rendering of CRI >90.

IP
65

Product	Housing Colour	Power	Luminous Flux	Kelvin	Item No.	CHF
Velaris	Dark grey, textured	14 W	1000 lm	3000 K	LZ-640888-017-DIM	322.00

Further Accessories


Product	Item No.	CHF
3M™Scotchlok™314 IDC, blue-white	FB-966430082	4.00

✦ Requires no mounting box





Housing colour: graphite, textured


Saturn Round | Saturn Square



Round



Square




Wall light

Wall light made of aluminium die-cast, incl. mounting set and LED converter, IK07


IP
65

Product	Power	Colour Rendering	Luminous Flux	Kelvin	Item No.	CHF
Round 120	4.2 W	CRI 85	337 lm	3000 K	MD-6841-GR-A	242.00
Round 210	8.4 W	CRI 85	637 lm	3000 K	MD-6842-GR-A	294.00
Square 120	4.2 W	CRI 85	337 lm	3000 K	MD-6843-GR-A	252.00
Square 210	8.4 W	CRI 85	637 lm	3000 K	MD-6844-GR-A	326.00

Charisma 2

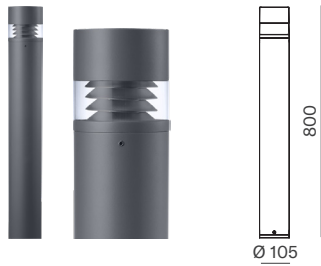

Charisma 2

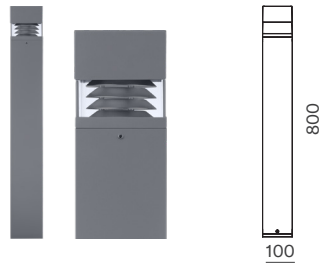

Charisma 2

 **Timeless Classic**

Bollard light

Charisma bollard light made of aluminium die-cast, polyester-epoxy powder coating (UV-resistant) with silicone seal, IK10, dimensions: Ø105 x 800 mm (Round) / 100 x 100 x 800 mm (Square)



Product	Colour	Power	Luminous Flux	Kelvin	Item No.	CHF
Round	graphite grey	12 W	1620 lm	CRI 80	UL-7822-901-GR	491.00
Round	dark grey, textured	12 W	1620 lm	CRI 80	UL-7822-901-DG	491.00
Square	graphite grey	12 W	1620 lm	CRI 80	UL-7825-901-GR	549.00
Square	dark grey, textured	12 W	1620 lm	CRI 80	UL-7825-901-DG	549.00

Further Accessories

Product	Item No.	CHF
Ground spike Little One, 500 mm Galvanised steel	95002N	91.00
Ground spike Big One, 450 mm Galvanised steel	95010K	369.00
TeeTube cable connection sleeve IP68	TH-400-C3A	17.00
Junction box Paguro Ø 6.5-12 mm	MH-5625	39.00

Motion sensor on request

Mini Cyclops® 35|70



Mini Cyclops

Bollard light

Aluminium die-cast, polyester-epoxy powder coating (UV-resistant), diffuser made of clear polycarbonate (UV-resistant), 180° unidirectional asymmetric downward light emission via lens optics, silicone seal, IK07, lifetime: 50,000 hrs / L70



Product	Colour	Power	Luminous Flux	Kelvin	Item No.	CHF
Mini Cyclops® 35	corten, textured	8.1 W	980 lm	3000 K	UL-7176-K-544-CS	433.00
Mini Cyclops® 35	graphite, textured	8.1 W	980 lm	3000 K	UL-7176-K-544-GR	433.00
Mini Cyclops® 70	corten, textured	8.1 W	980 lm	3000 K	UL-7175-K-544-CS	520.00
Mini Cyclops® 70	graphite, textured	8.1 W	980 lm	3000 K	UL-7175-K-544-GR	520.00

Further Accessories

Product	Item No.	CHF
Ground spike Big One, 450 mm Galvanised steel	95010K	369.00
TeeTube cable connection sleeve IP68	TH-400-C3A	17.00
Junction box Paguro Ø 6.5-12 mm	MH-56252	39.00


Motion sensor on request (only for Mini Cyclops® 70)

✦ Light emission 180°



Housing colour: graphite, textured

NOVA

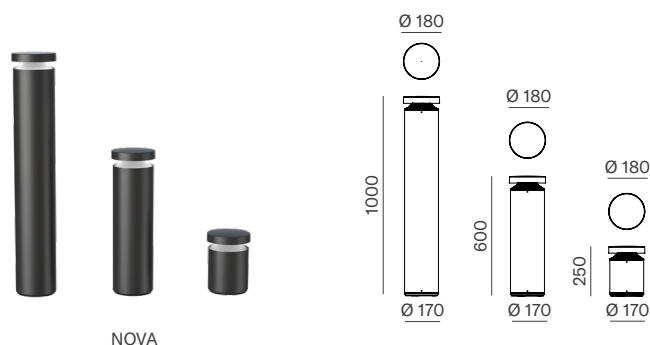

- ✦ **Very robust**
- ✦ **Easy installation**
- ✦ **Attractive price**

Bollard light

Extruded aluminium body with die-cast head, powder coating, IP65, IK10

Light emission: 360° or 180°

Lifetime: 50,000 hrs / L80



Product	Colour	Power	Luminous Flux	Kelvin	Diameter	Light Emission	Item No.	CHF
Nova-180 250 mm	Black	24 W	1124 lm	3000 K	Ø 180 mm	180°	NX-24380250SZ-180	313.00
Nova-180 600 mm	Black	24 W	1124 lm	3000 K	Ø 180 mm	180°	NX-24380600SZ-180	409.00
Nova-180 1000 mm	Black	24 W	1124 lm	3000 K	Ø 180 mm	180°	NX-243801000SZ-180	515.00

Product	Colour	Power	Luminous Flux	Kelvin	Diameter	Light Emission	Item No.	CHF
Nova 250 mm	Black	24 W	1124 lm	3000 K	Ø 180 mm	360°	NX-24380250SZ	313.00
Nova 600 mm	Black	24 W	1124 lm	3000 K	Ø 180 mm	360°	NX-24380600SZ	409.00
Nova 1000 mm	Black	24 W	1124 lm	3000 K	Ø 180 mm	360°	NX-243801000SZ	515.00

Further Accessories

Product	Item No.	CHF
Mounting system for Nova	NX-2438-BA	17.00
TeeTube cable connection sleeve IP68	TH-400-C3A	17.00
Junction box Paguro Ø 6.5-12 mm	MH-5625	39.00

Motion sensor on request



